

PRESIDENT

HENRY II

AM/FM

12/24V

6 COLOR RINGS

**SIMPLY
EASY**



Réf. TXPR166



FEATURES

- LED display with display rings
- Key Beep/ Roger Beep
- 2 Emergency channels (EMG)
- Scan
- Vox (Hands-free function)
- ANL/NB / Volume accessoire
- TOT / LOCK
- ...
- Supplied accessories:
 - 1 Electret microphone
 - 1 Support
 - 1 Mounting cradle
 - Screws and fused power cord
 - 6 Color rings

6 COLOR RINGS

*See warranty conditions on our website
Groupe **PRESIDENT** ELECTRONICS since 1978
S.A. Capital 10.000.000 €
Siège Social / Head Office – France – Route de Sète
BP 100 – 34540 BALARUC
Site : <http://www.president-electronics.com>
e-mail : groupe@president-electronics.com



Compatible
REMOTE BT MIKE
REMOTE MIKE




VOX built in



HENRY II

Functions

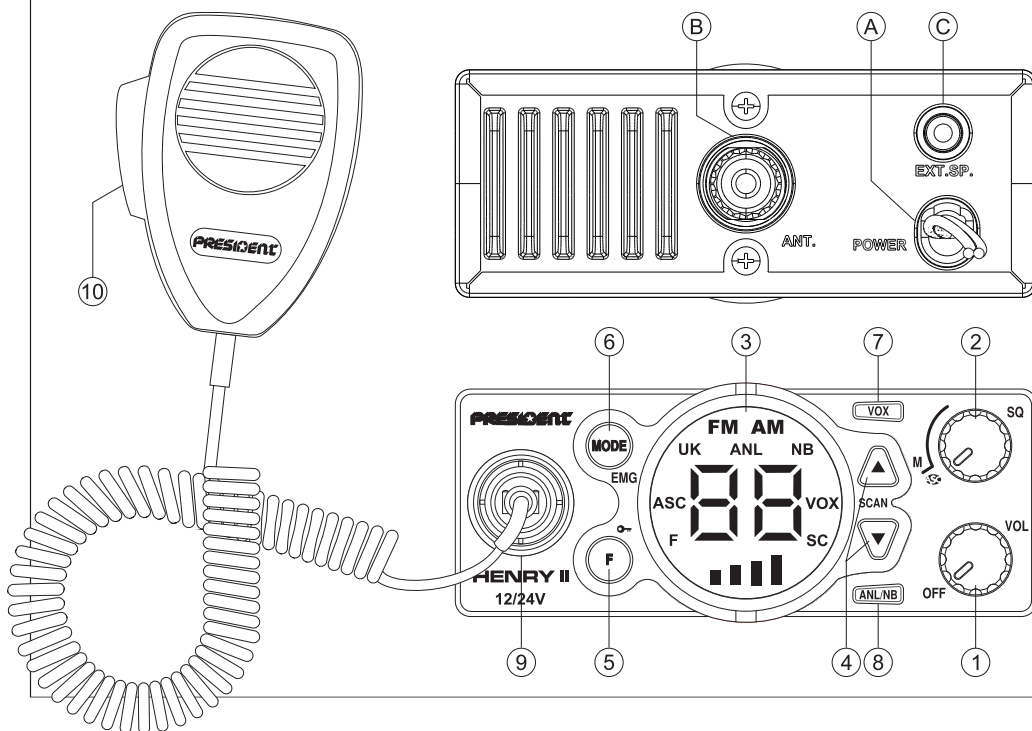

- 1) ON/OFF ~ VOLUME
- 2) ASC (Automatic Squelch Control) ~ SQUELCH
- 3) DISPLAY
- 4) CHANNEL SELECTOR ~ SCAN
- 5) F ~ LOCK
- 6) MODE ~ EMG
- 7) VOX ~ VOX SET
- 8) ANL/NB ~ ACCESSORY VOLUME
- 9) 6 PIN MICROPHONE PLUG
- 10) PTT (Push To Talk)

- A) DC-POWER TERMINAL (13.2/26.4 V)
 B) ANTENNA CONNECTOR (SO-239)
 C) JACK FOR EXTERNAL OPTIONAL SPEAKER (8 Ω, Ø 3.5 mm)

1) GENERAL

- Channels : 40
- Modulation modes : AM / FM
- Frequency range : 26.965 MHz to 27.405 Mhz
- Antenna impedance : 50 ohms
- Power supply : 13.2/26.4 V
- Dimensions (mm) : 115 (L) x 105 (P) x 45 (H)
- Weight : 0.420 kg
- Supplied accessories : Electret microphone with support, mounting cradle, screws and fused power cord, 6 color rings.

2) TRANSMISSION

- Frequency allowance : ± 300 Hz
- Carrier power : 4 W
- Transmission interference : < 4 nW (-54 dBm)
- Audio response : 300 Hz to 3 KHz
- Emitted power in the adj. channel : < 20 μ W
- Microphone sensitivity : 3.0 mV
- Max. drain : < 2 A (13.2 V) / < 1 A (26.4 V)
- Modul. signal distortion : 2 %

3) RECEPTION



- Max. sensitivity at 20 dB sinad : 0.5 μ V - 113 dBm (AM)
0.35 μ V - 116 dBm (FM)
- Frequency response : 300 Hz to 3 kHz
- Adj. channel selectivity : 60 dB
- Max. audio power : 3 W
- Squelch sensitivity : min. 0.2 μ V - 120 dBm
max. 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequency rejection rate : 70 dB
- Max. drain : 200~500 mA (13.2 V)
140~300 mA (26.4 V)



All European standards



Réf. TXPR166

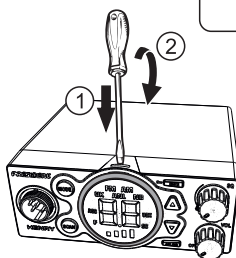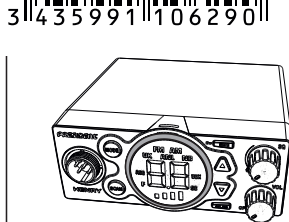

Removing the display ring

